

# OFFICE OF THE MARION COUNTY SURVEYOR

## SECTION RECORD CORNER

SECTION 5 TOWNSHIP 14 RANGE 4

DATE: 8-17-07

PARTY CHIEF: Wilcoxen

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 2-14-02



IN. S.P.C. E ZONE NAD '83

NAME: 14040502

N: 493633.6600(m)

E: 61884.6720(m)

Thompson 5000S

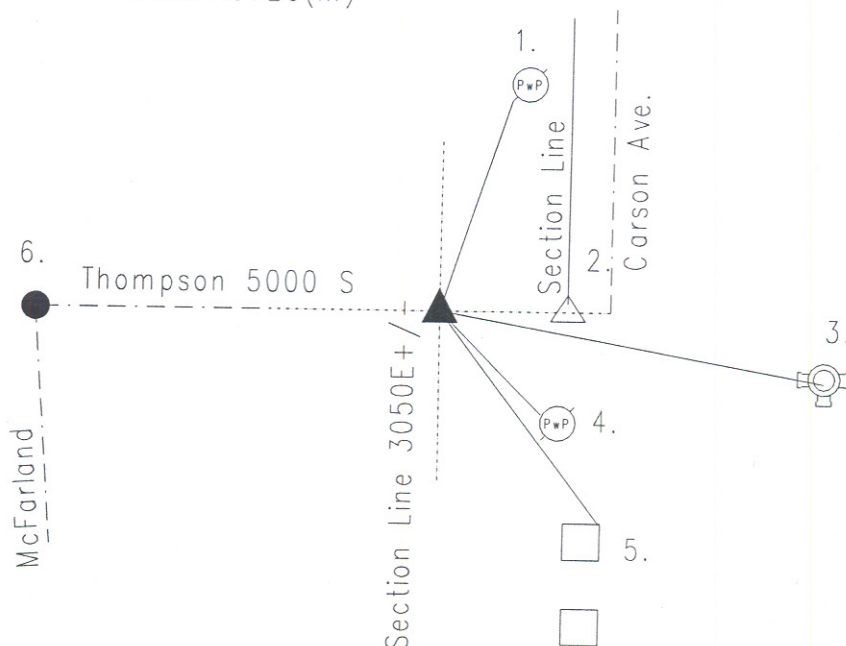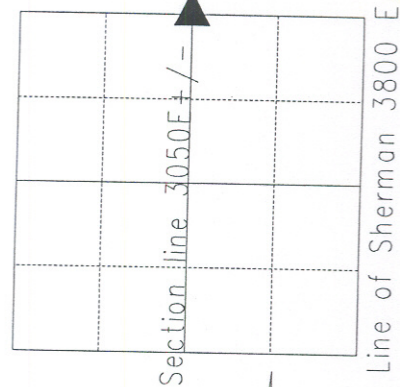

Original post set 1820 by Hendricks with witness: 38" oak N 48 E 17 links; 14" beech S 41 E 8 links per Marion County Atlas pg. 9. Hosbrook 3-19-1850 called corner obtained by running and measuring a half-mile E & W of point and witness found at both of those points. 12-28-71 Rednour called road nail. 7-2-75 Fortner called same. 10-20-88 Gries called same.. 8-7-90 excavated and Pk nail found at surface. Large road nail found 5" down. No stone found Harrison set. Re-tied 4-12-96 by Wilcoxen, Re-tied 2-14-02 by Wilcoxen. Re-tied 8-17-07 by Wilcoxen.

14040502

REF.	DISTANCE	DESCRIPTION
1.	77.13'	PK nail SW PwP#202-700A 12"up
2.	57.72'	Due F to Section line S 1/4 32-15-4
3.	132.10'	Top nut of fire hydrant
4.	29.64'	PK nail NW PwP#324-700B 8"up
5.	65.63'	NE corner of brick column "Carson Square Sign"
6.	362.80'	Due W to C/L of McFarland Road